




Argo 8x8

SPECIAL EDITION 750 HDi

Utility Transport

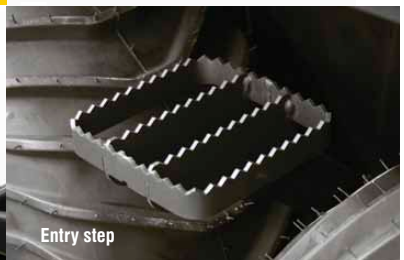

SPECIFICATIONS FOR 8X8 750 HDi SPECIAL EDITION





ENGINE	4 cycle OHV V-Twin gasoline engine, electronic ignition, full pressure lubrication and oil filter 3 year limited Kohler engine warranty	
MODEL	Kohler Aegis LH 775	
HORSEPOWER	31	
DISPLACEMENT	748cc	
COOLING	Liquid Cooled	
STARTING	Electric	
BRAKES	Hydraulic	
STEERING	One-piece ergonomic handlebar steering control with mounted brake lever. For safety and ease of handling, the ARGO steering transmission provides continuous torque to all axles.	
CONTROLS	Right-hand twist grip throttle control assembly including light, signal and horn switches, dash mounted ignition switch.	
CLUTCH	Belt-driven, Continuously Variable Transmission (CVT) maximizes engine power to the transmission.	
TRANSMISSION	ADMIRAL triple differential steering transmission with dedicated Hi and Low selector; Forward, Neutral, Reverse.	
DRIVE SYSTEM	Roller chains drive machined sprockets that are spline-fit onto 1 1/4" diameter axles. Bearings are greaseable.	
FRAME	Formed steel channel construction, welded for high strength and durability. Polyester powder-coated for lasting protection.	
BODY	Vacuum formed High Molecular Weight Polyethylene	
FULL SKID PLATE	Standard	
LOAD CAPACITY¹	ON LAND	454 kg (1000 lbs) total
	ON WATER	386 kg (850 lbs) total
TOWING CAPACITY²	818 kg (1800 lbs)	
SEATING CAPACITY	ON LAND	6 persons
	ON WATER	4 persons
FUEL CAPACITY	27 litres See-through polyethylene fuel tank. 8 hours of operation ³	
SPEED⁴	ON LAND	32 km/h / 20 mph
	ON WATER⁵	4 km/h (5.5 km/h with ARGO AT189 tires)
SHIPPING WEIGHT	641 kg (1410 lbs)	
AXLE BEARING EXTENSIONS	Front - Standard Rear - Standard	
LCD DIGITAL GAUGE CLUSTER	Speedometer, Odometer, Voltmeter, Hourmeter, Tachometer, Engine Coolant Temperature, Low Oil Pressure, Parking Brake Reminder and Check Engine Light	
TIRES	ARGO 25x12.00-9 NHS	
GROUND PRESSURE	14.5 kPa using tires 4.6 kPa using tracks	
GROUND CLEARANCE	TIRES	240 mm (9.5")
	TRACKS	265 mm (10.5")
OPERATING CONDITIONS	All weather, all terrain, -40°C to +40°C	

- Capacity includes occupants, cargo, outboard motor and fuel, and installed accessories. Max. outboard motor size 7.4 kW (9.9 hp).
- Towing capacity is approximate and depends on type of surface, load on vehicle as well as incline. Max Hitch Tongue Load (when equipped with hitch) 100 lbs / 45kg for all models
- Fuel consumption depends on load and operating conditions.
- All speeds are approximate and depend on conditions.
- Always wear approved Personal Floatation Device (PFD) when operating in water or on ice.

Appearance and specifications subject to change without notice.

AVAILABLE ARGO COLORS

*Colors are reproduced with great care, but may vary slightly on actual vehicles.

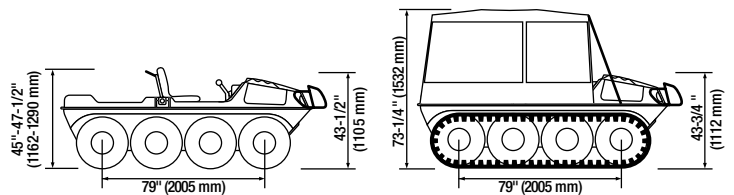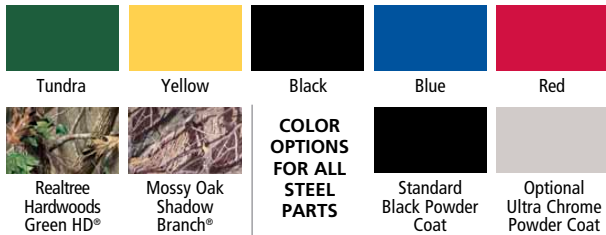

ADJUSTABLE BUCKET SEATS:
 Weight adjustment: 50 -120 kg
 Fore & aft adjustment: 160 mm
 Height adjustment: 60 mm
 Suspension travel: 70 mm

SUPER TRACK: Adds 1 in. (25mm) to vehicle height
RUBBER TRACK: Adds 1-1/4 in. (32mm) to vehicle height
CONV. TOP: 1-1/2 in. (38mm) less than ROPS height.



220 Bergey Court, New Hamburg,
 ON, Canada N3A 2J5
 Tel: (519) 662-4000 • Fax: (519) 662-2421
 www.ARGOutv.com

Proud to be located in



treadlightly! **Safety!**
 LEAVING A GOOD IMPRESSION ...always in Season!